Customer Display
DSP860
Installation Manual

TM951045

Required Items

The following items are used to attach the Display to the Stand.

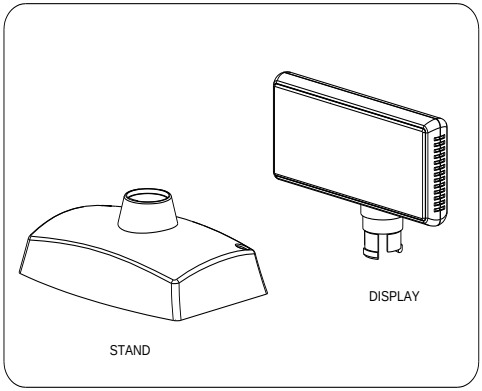

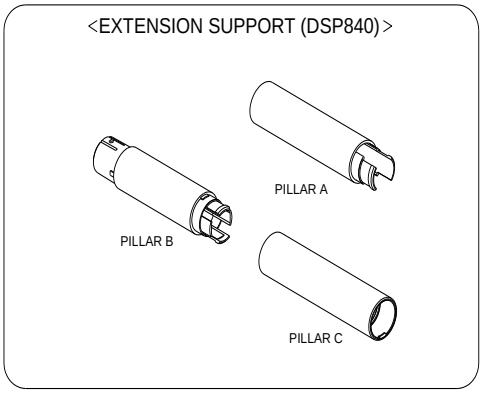

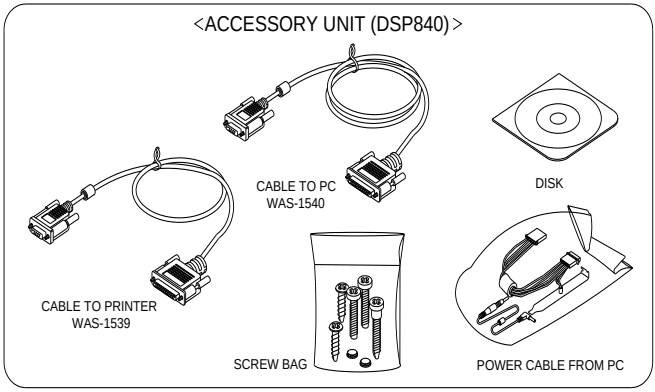

Remrk: CABLE TO PRINTER (WAS-1539) is an optional item.

Assembling Steps

1. Get the Stand and the Stand Plate.

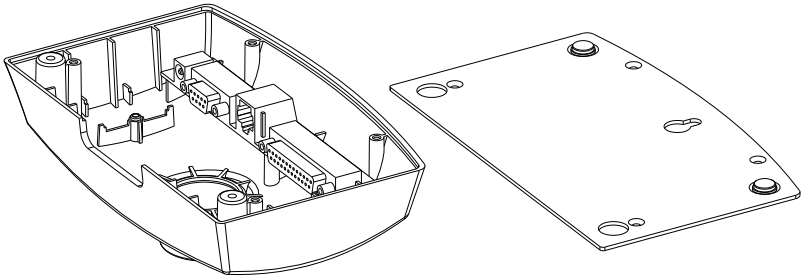

STAND STAND PLATE

2. Get the DISPLAY unit and place the Cable from the Display through the extension pillars to the Stand.
   When extending the height of the Stand, attach the extension pillars with different heights: Low, Mid-low, Mid-high and High shown as below to the Stand.

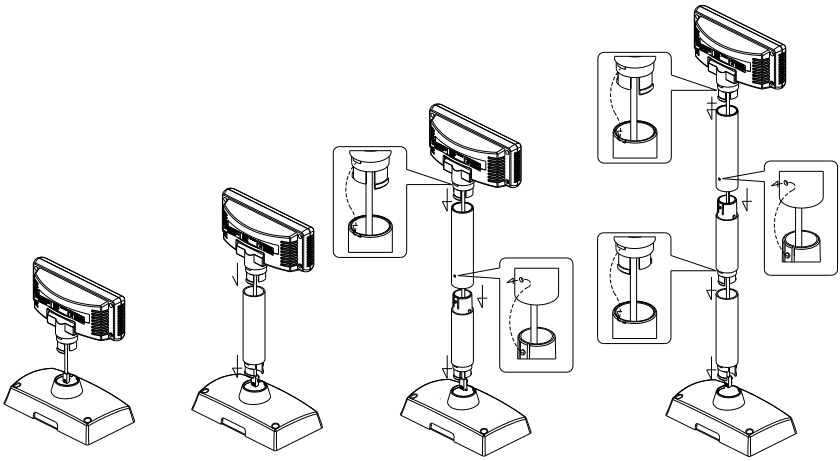

3. Insert the tab on the Display (or the extension Pillar) into the hole on the Stand until you feel it clicked.

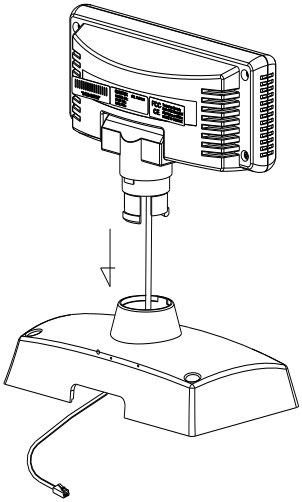

4. Connect the cable from the Display to the RJ connector (TO DSP) inside the Stand until you feel it clicked.
   Also connect the enclosed D-connector cable (CABLE TO PC) to the “ To Host ” connector and plug the power cable (POWER CABLE FROM PC) into the DC Jack (DC 12V) and connect the optional Printer D-connector cable (CABLE TO PRINTER) to the “ To Printer ” connector when needed

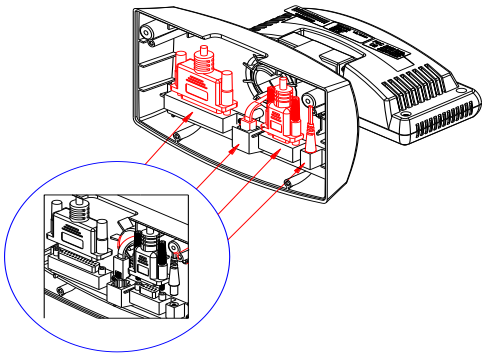

Note:CABLE TO PRINTER (WAS-1539) is an optional item You may order it when needed.

5. Cover the Stand Plate back and fasten the screws.

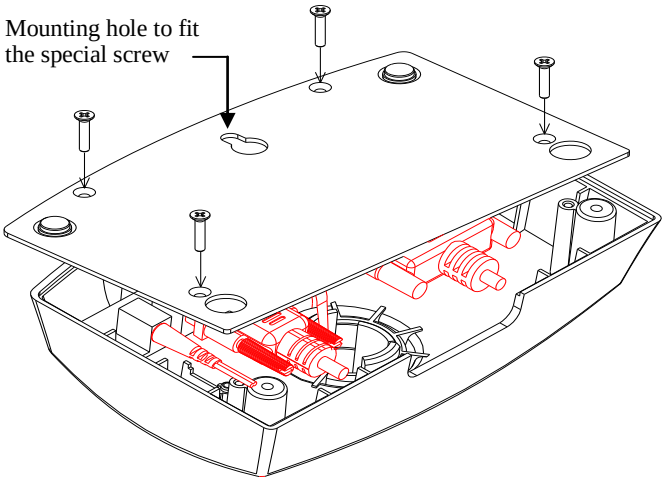

6. You may use the enclosed m ounting screws (one Special screw and two Wood screws) to fix the Display on the wooden table surface.
   Get the Mounting hole on the Stand Plate to fit the Special screw first and then fix the two Wood screws.

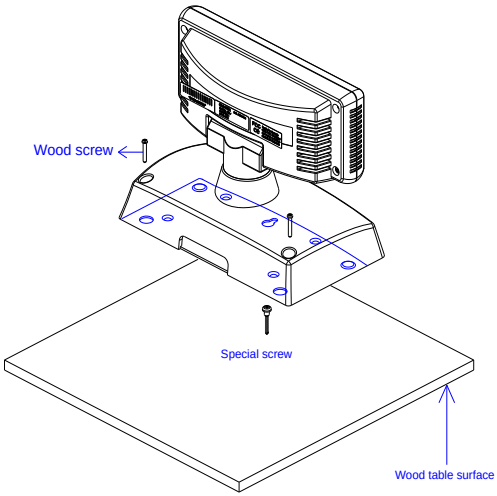

The Display/Pillar/Stand Dimensions

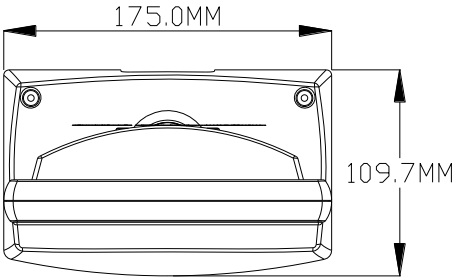

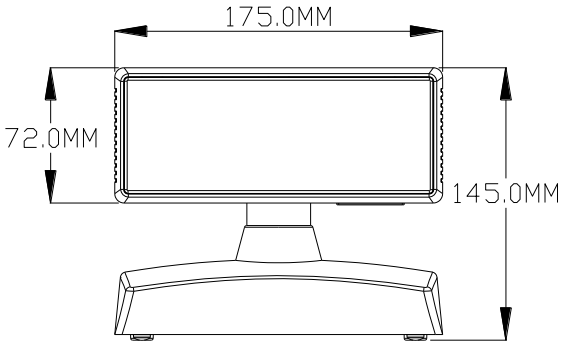

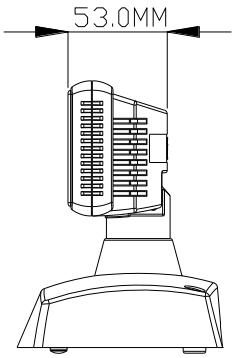

The Display/Pillar/Stand Dimensions

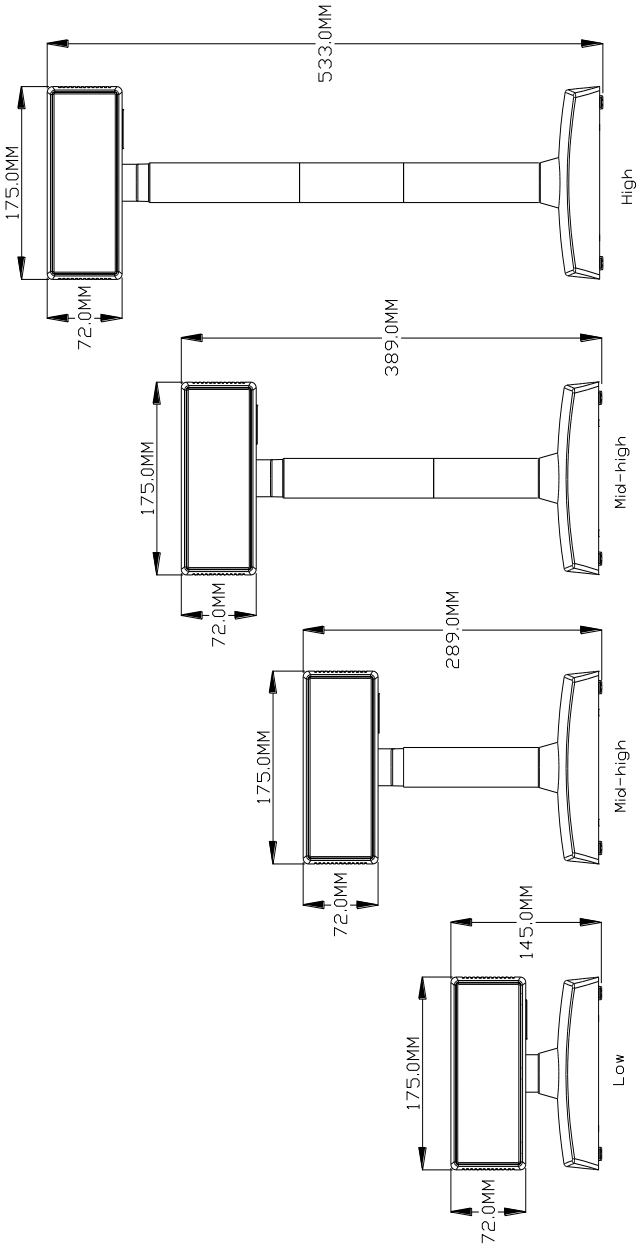
533.0MM
175.0MM
72.0MM
High
389.0MM
175.0MM
72.0MM
Mid-high
289.0MM
175.0MM
72.0MM
Mid-high
145.0MM
175.0MM
72.0MM
Low